



## Charging without Registration

## Ecotap type Homebox Flex CHARGINGCARD LZR

This car charging station was developed for ease of use and features a flexible coil cord expandable up to 4 metres. The plug can be connected to your electric vehicle directly. Made of 2 mm steel and designed for wall.

The start/stop procedure works by means of a Charging Card. This charging station communicates with the car. After all safety regulations have been checked, the maximum permissible charge current is applied. The charging process is started automatically.



Car Charging Station



Charger for at home



Start- and Stop procedure by Charging Card



Flexible Charging Cable

## Technical Specifications

Start- and Stop procedure by Charging Card

Number of charging points: 1

Connection: Flexible coil cord, expandable up to 4 metres

Value of connectivity: From 1x16A tot 3x32A

Power output: 0 t/m 22 Kw

Communication: Controller met RFID-reader

Casing material: Staal 2,2 mm

Standard Colour: RAL 7035

Treatment has undergone anti-corrosion treatment and features powder coating

Measurements casing (HxDxB): 400mm x 120mm x 260mm

Weight: 9kg

Norms: NEN1010/EU/35-IEC: 61815-1  
VDE-AR-E 2623-2-2/I55/IK10


Standard Warranty: 1 year (option: extended warranty with 4 years)

Available in the following versions:

Plug type 1 or 2 , 16Amp 1 phase, up to 3.7 kW  
Plug type 2 , 16Amp 3 phase, up to 11 kW  
Plug type 2 , 16Amp, 1 phase, up to 7,4 kW  
Plug type 2 , 16Amp 3 phase, up to 22 kW



Ecotap type Homebox Flex Card reader

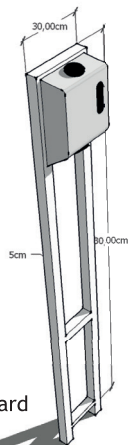

Option: Standard

